

DU012

C250 (Group 3)


Ductile Iron Gully Grating

DU012 325x300x70



Ductile iron gratings, for use in areas where not extending more than 500mm from the kerb face into carriageway. Capable of withstanding a 250kN (25 tonnes) test load.

FreeFlow™
C250

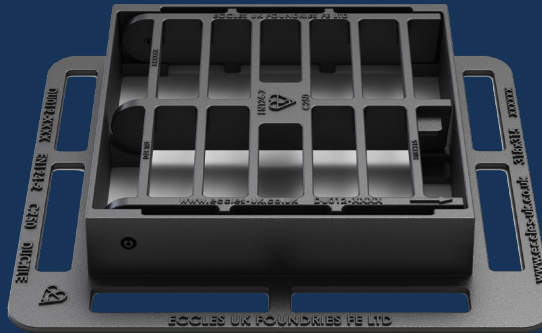

PRODUCT CODE	DU012	BASE SIZE	470mm x 400mm
CLEAR OPENING	325mm x 300mm	DEPTH	70mm

FEATURES

- KITEMARK**
Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.
- RATIO**
Ductile iron for improved weight to strength ratio.
- COATING**
Black coated finish.
- STRONG & DURABLE**
Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.
- WATERFLOW**
Designed and engineered for Group 3 & 4 areas with high rainfall. Providing a waterway allowing for increased water flow.
- CAPTIVE ANTI-THEFT HINGE**
Captive hinges reduce risk of theft and allows easy access for cleaning.
- RECYCLABLE**
Long life asset with high circularity contributing to the reduction in carbon footprint.

DU012

C250 (Group 3)

Ductile Iron Gully Grating

DU012 325x300x70



Ductile iron gratings, for use in areas where not extending more than 500mm from the kerb face into carriageway. Capable of withstanding a 250kN (25 tonnes) test load.

FreeFlow[™]
C250

DATA

Dimensions

A / Base Size: 470mm x 400mm

B / Clear Opening: 325mm x 300mm

C / Depth: 70mm

Materials

Ductile Iron

Finish

Black Coated

Certification



BSI Kitemark

Standard

EN124-2:2015

Product Type

Ductile Iron Gully Grating

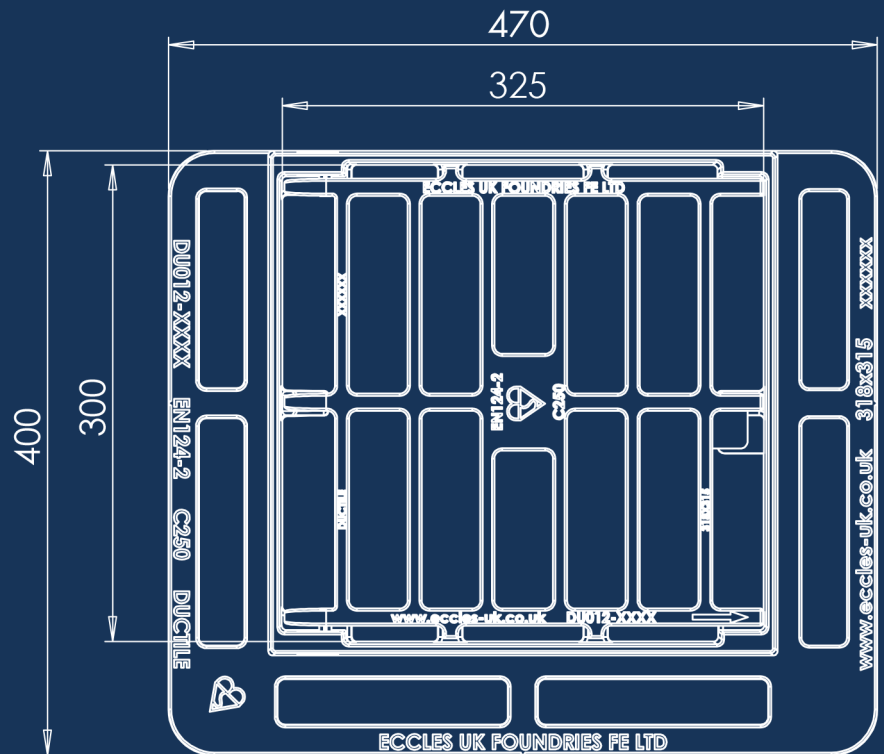

- A** BASE SIZE
- B** CLEAR OPENING
- C** FRAME DEPTH

DIAGRAM KEY

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.

eccles[®]
Intelligent Access & Drainage Solutions[™]

+44 (0)1922 613 222
enquiries@ecclesproducts.com
www.ecclesproducts.com

Eccles (UK Foundries FE) Limited
Portland Street, Walsall,
West Midlands, WS2 8AA, UK

