

DU137

E600 (Group 5)


Ductile Iron Gully Grating

DU137 450x450x100



Ductile iron gratings, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 600kN (60 tonnes) test load.

GridFlow[™]
E600

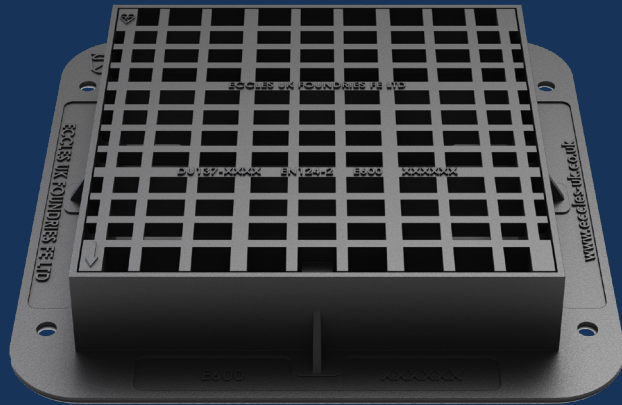

PRODUCT CODE	DU137	BASE SIZE	600mm x 600mm
CLEAR OPENING	450mm x 450mm	DEPTH	100mm

FEATURES

-  **KITEMARK**
Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.
-  **RATIO**
Ductile iron for improved weight to strength ratio.
-  **COATING**
Black coated finish.
-  **STRONG & DURABLE**
Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.
-  **WATERFLOW**
Designed and engineered for Group 3 & 4 areas with high rainfall. Providing a waterway allowing for increased water flow.
-  **PEDESTRIAN**
Wheelchairs, pushchairs, trolleys and bicycles.
-  **CAPTIVE ANTI-THEFT HINGE**
Captive hinges reduce risk of theft and allows easy access for cleaning.
-  **DEPTH OF INSERTION**
Meets the depth of insertion requirements of BS EN124-2:2015, CD534 and BS7903.
-  **RECYCLABLE**
Long life asset with high circularity contributing to the reduction in carbon footprint.

DU137

E600 (Group 5)

Ductile Iron Gully Grating

DU137 450x450x100



Ductile iron access covers, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 600kN (60 tonnes) test loads.

GridFlowTM
E600

DATA

Dimensions

A / Base Size: 600mm x 600mm

B / Clear Opening: 450mm x 450mm

C / Depth: 100mm

Materials

Ductile Iron

Finish

Black Coated

Certification


BSI Kitemark

Standard

EN124-2:2015

Product Type

Ductile Iron Gully Grating

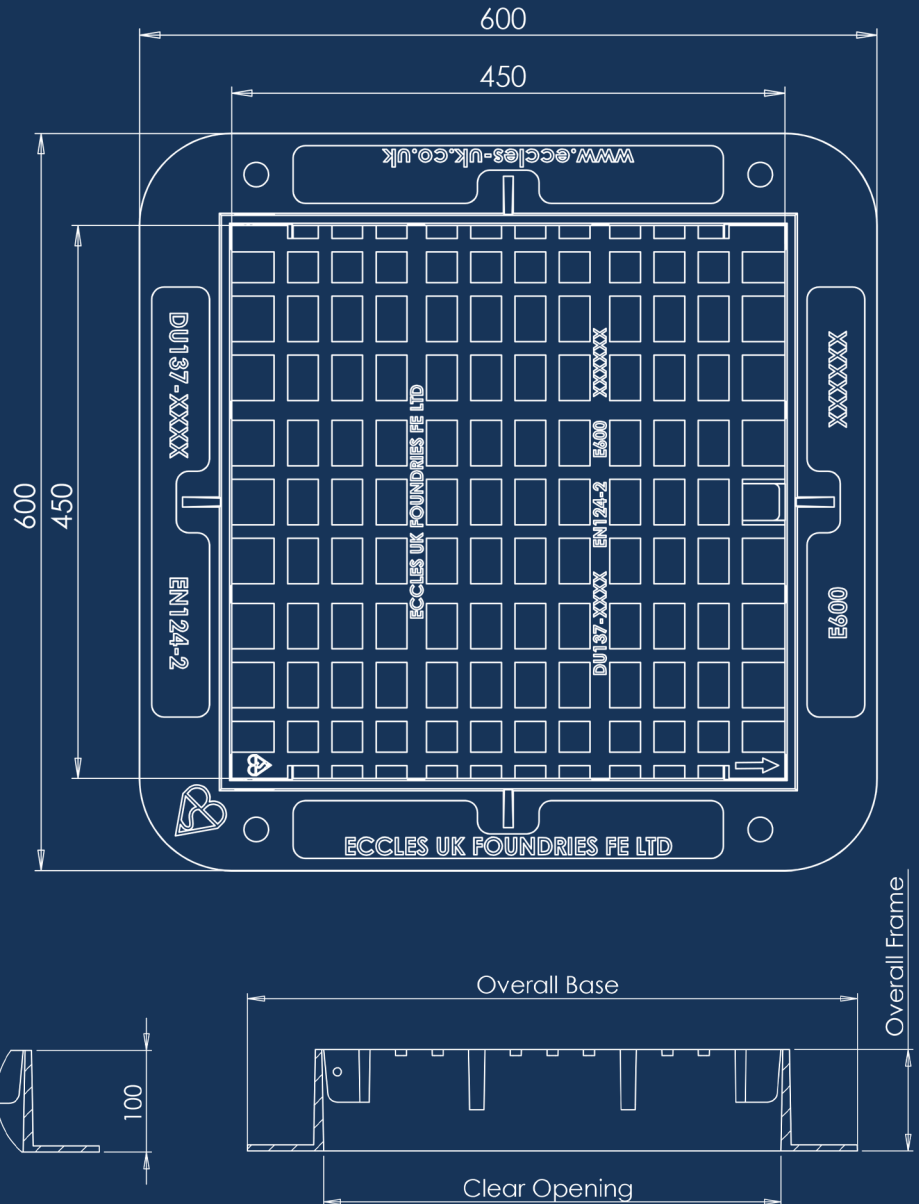

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.

DIAGRAM KEY

- A** BASE SIZE
- B** CLEAR OPENING
- C** FRAME DEPTH