

DU141

C250 (Group 3)

Ductile Iron Gully Grating

DU141 225x225x70




Ductile iron gratings, for use in areas where not extending more than 500mm from the kerb face into carriageway. Capable of withstanding a 250kN (25 tonnes) test load.

FreeFlowTM
C250

OPTIONAL EXTRAS

- **Locked**

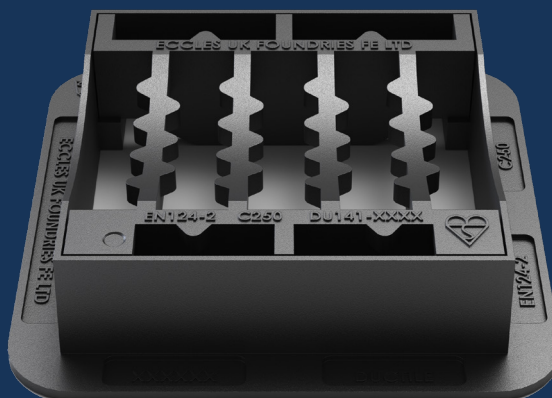

PRODUCT CODE	DU141	BASE SIZE	295mm x 295mm
CLEAR OPENING	225mm x 225mm	DEPTH	70mm

FEATURES



KITEMARK

Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.



RATIO

Ductile iron for improved weight to strength ratio.



COATING

Black coated finish..



STRONG & DURABLE

Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.



WATERFLOW

Designed and engineered for Group 3 & 4 areas with high rainfall. Providing a waterway allowing for increased water flow.



CAPTIVE ANTI-THEFT HINGE

Captive hinges reduce risk of theft and allows easy access for cleaning.



DISHED

Concaved to match drainage channels.



RECYCLABLE

Long life asset with high circularity contributing to the reduction in carbon footprint.

DU141

C250 (Group 3)

Ductile Iron Gully Grating

DU141 225x225x70



Ductile iron gratings, for use in areas where not extending more than 500mm from the kerb face into carriageway. Capable of withstanding a 250kN (25 tonnes) test load.

FreeFlowTM
C250

DATA

Dimensions

A / Base Size: 295mm x 295mm

B / Clear Opening: 225mm x 225mm

C / Depth: 70mm

Materials

Ductile Iron

Finish

Black Coated

Certification

BSI Kitemark

Standard

EN124-2:2015

Product Type

Ductile Iron Gully Grating

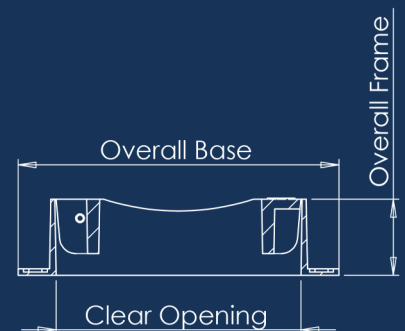

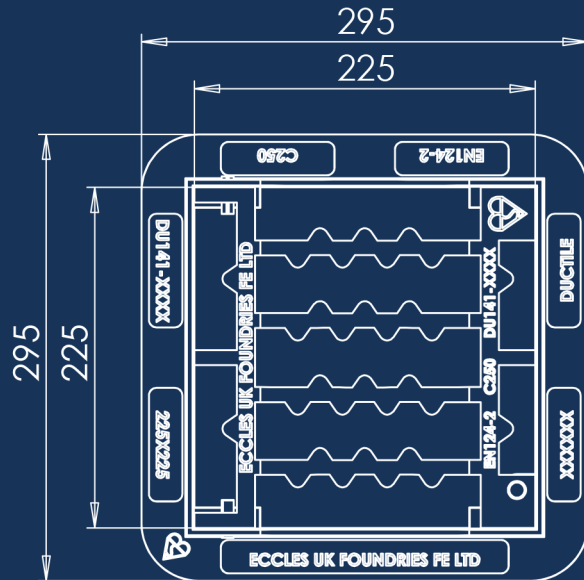


DIAGRAM KEY

- A** BASE SIZE
- B** CLEAR OPENING
- C** FRAME DEPTH

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.