

# DU222

E600 (Group 5)


## Ductile Iron Access Cover

**DU222 1220x675x150**



Ductile iron access covers, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 600kN (60 tonnes) test load.

**UltraGrip™**  
E600

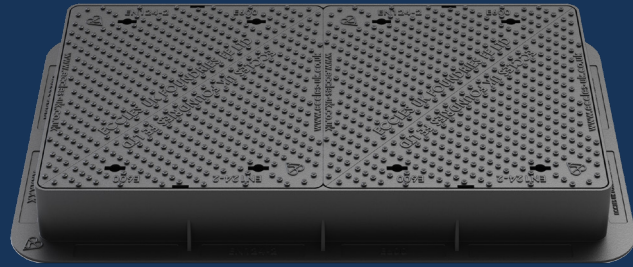

### OPTIONAL EXTRAS

- **Badged**
- **Locked**
- **Vented**
- **Sealing Plate**

|                      |                |                  |                |
|----------------------|----------------|------------------|----------------|
| <b>PRODUCT CODE</b>  | DU222          | <b>BASE SIZE</b> | 1370mm x 825mm |
| <b>CLEAR OPENING</b> | 1220mm x 675mm | <b>DEPTH</b>     | 150mm          |

### FEATURES



#### SMARTGRIP TECHNOLOGY™

Unique pattern design provides a PSRV value of >70 (UKAS Accredited 3rd Party).



#### KITEMARK

Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.



#### THREE POINT SUSPENSION

Three point suspension for non-rock stability.



#### RATIO

Ductile iron for improved weight to strength ratio.



#### COATING

Black coated finish.



#### STRONG & DURABLE

Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.



#### INCREASED BEDDING AREA

Designed with a large flange for increased bedding area and decreased frame bearing pressure that meet the requirements of CD534, BS7903:2020.



#### DEPTH OF INSERTION

Meets the depth of insertion requirements of BS EN124-2:2015, CD534 and BS7903.



#### RECYCLABLE

Long life asset with high circularity contributing to the reduction in carbon footprint.

# DU222

E600 (Group 5)

## Ductile Iron Access Cover

**DU222 1220x680x150**



Ductile iron access covers, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 600kN (60 tonnes) test loads.

**UltraGrip™**  
E600

### DATA

#### Dimensions

- A / Base Size: 1370mm x 830mm
- B / Clear Opening: 1220mm x 680mm
- C / Depth: 150mm

#### Materials

Ductile Iron

#### Finish

Black Coated

#### Certification




BSI Kitemark

#### Standard

EN124-2:2015

#### Product Type

Ductile Iron Access Cover

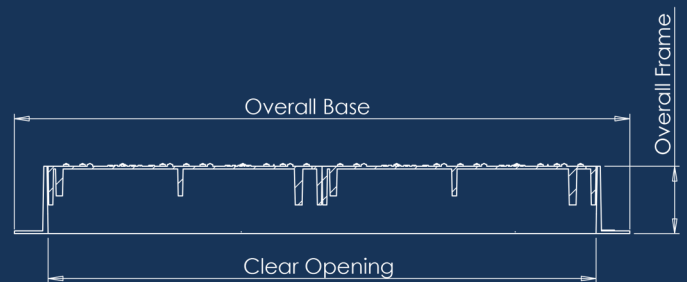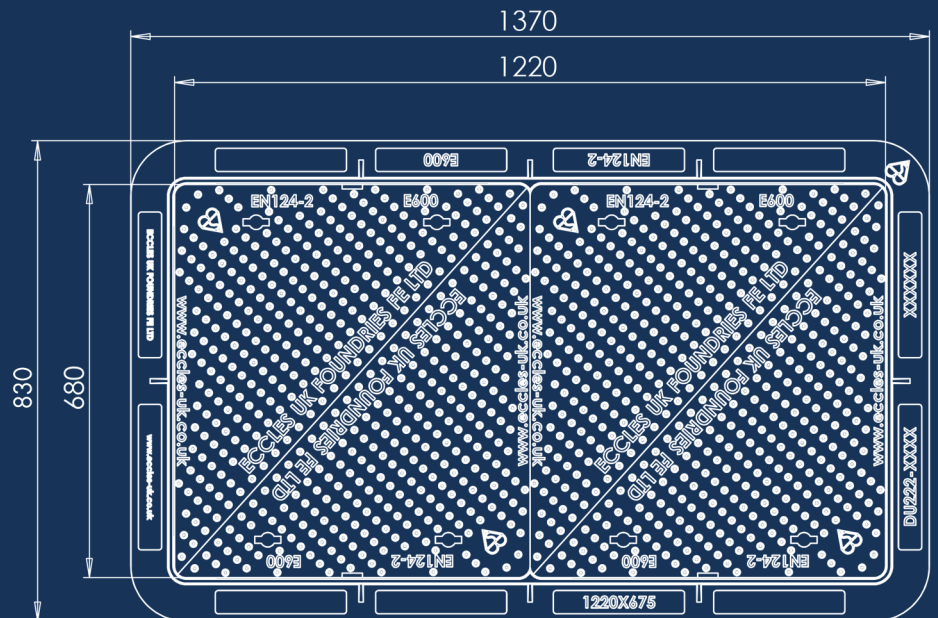

**SmartGrip™**  
Technology

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.

### DIAGRAM KEY

- A** BASE SIZE
- B** CLEAR OPENING
- C** FRAME DEPTH

**eccles®**  
Intelligent Access & Drainage Solutions™

**+44 (0)1922 613 222**  
enquiries@ecclesproducts.com  
[www.ecclesproducts.com](http://www.ecclesproducts.com)

Eccles (UK Foundries FE) Limited  
Portland Street, Walsall,  
West Midlands, WS2 8AA, UK

