DU330

D400 (Group 4)

Ductile Iron Access Cover

DU330 1830x680x100



Ductile iron access covers, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 400kN (40 tonnes) test load.



OPTIONAL EXTRAS

- Badged
- Locked
- Vented



PRODUCT CODE	DU330	BASE SIZE	1980mm x 830mm
CLEAR OPENING	1830mm x 680mm	DEPTH	100mm

FEATURES

SMARTGRIP TECHNOLOGY™

Unique pattern design provides a PSRV value of >70 (UKAS Accredited 3rd Party).

W KITEMARK

Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.

THREE POINT SUSPENSION

Three point suspension for non-rock stability.

RATIO

Ductile iron for improved weight to strength ratio.

COATING

Black coated finish.

STRONG & DURABLE

Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.

DEPTH OF INSERTION

Meets the depth of insertion requirements of BS EN124-2:2015, CD534 and BS7903.

COMPLIES WITH MCHW

Manual for Contract Highway Works, Series 500.

OMPLIES WITH DMRE

Meets the requirements of Highways England specification CD534.

RECYCLABLI

Long life asset with high circularity contributing to the reduction in carbon footprint.







DU330

D400 (Group 4)

Ductile Iron Access Cover

DU330 1830x680x100



Ductile iron access covers, suitable for use in areas where cars and lorries have access, including carriageways, hard shoulders and pedestrian zones. Capable of withstanding a 400kN (40 tonnes) test load.



DATA

Dimensions

A / Base Size: 1980mm x 830mm B / Clear Opening: 1830mm x 680mm

C / Depth: 100mm

Materials

Ductile Iron

Finish

Black Coated

Certification

BSI Kitemark

Standard


EN124-2:2015

Product Type


Ductile Iron Access Cover



Disclaimer. Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.

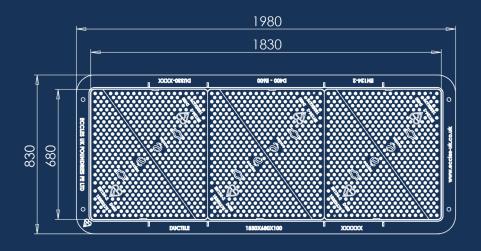



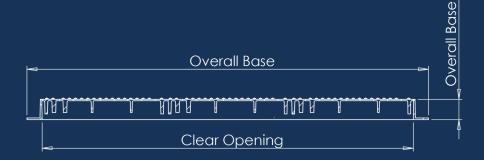

A BASE SIZE

DIAGRAM KEY

B CLEAR OPENING

C FRAME DEPTH



