ECOM261CR

35kN (3.5 tonnes)

Composite recessed access cover and polypropylene frame suitable for concrete screed.

Multi₆₀™

Composite Recessed Access Cover and Frame

ECOM261CR 600x450x60



PRODUCT CODE	ECOM261CR	BASE SIZE	700mm x 550mm
CLEAR OPENING	600mm x 450mm	DEPTH	60mm

FEATURES

Competitively priced against legacy materials used for the equivalent application.

ANTI-FATIGUE

Our extensively designed and developed top pattern matrix provides a high wearability. Ideal for areas with high pedestrian footfall.

LOW VIBRATION RATE

Our unique composition of material allows for minimal to no vibrations. Ensuring the supporting area and structures are unaffected by the trafficking of the cover.

HIGH UV RESISTANCE

The Unique composition of the eco cover range provides a high UV resistance value, ensuring the product a maintain a high level of aesthetics.

SILENT ENGINEERING

 \mathfrak{N}

Significantly reduced noise in service in comparison to conventional materials user for similar applications.

Long life asset with high circularity contributing to the reduction in carbon footprint.

EASY FIT

Designed and manufactured for ease of installation and maintenance.

🔀 LIFESPAN

Our unique SMC material has been researched and designed to ensure a long lifespan. Utilising some of the most innovate techniques to increase the ECO covers wearability and lifespan.

LIGHTWEIGHT

30 to 40% lighter than materials used for the same application.

(MULTIFILL (INTERNAL)

To provide an unobtrusive access that matches the surrounding area. They are ideally suited for internal or external use where a screed or tile infill is required.

🗙 🌑 🛛 LOCKED 4 SCREWS / RUBBER SEALED



+44 (0)1922 613 222

enquiries@ecclesproducts.com www.ecclesproducts.com Eccles (UK Foundries FE) Limited Portland Street, Walsall, West Midlands, WS2 8AA, UK Guily Tops and Manhole Covers KITEMARK

ECOM261CR

35kN (3.5 tonnes)

Composite Recessed Access Cover and Frame

ECOM261CR 600x450x60

Composite recessed access cover and polypropylene frame suitable for concrete screed.



DATA

Dimensions

A / Base Size: 700mm x 550mm B / Clear Opening: 600mm x 450mm

C / Depth: 60mm

Materials

Composite

Finish

MicroTextured


Standard

Tested to EN124

Product Type

Composite Recessed Access Cover and Frame



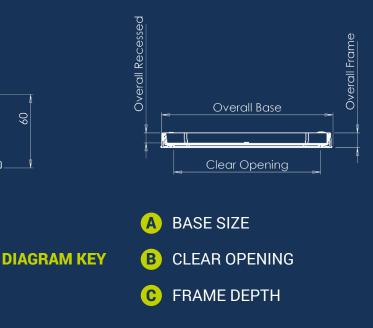

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.



+44 (0)1922 613 222

enquiries@ecclesproducts.com www.ecclesproducts.com

Eccles (UK Foundries FE) Limited Portland Street, Walsall, West Midlands, WS2 8AA, UK

